


UNIQ[®] SPERSE 770U

Low molecular weight dispersant for solvent based

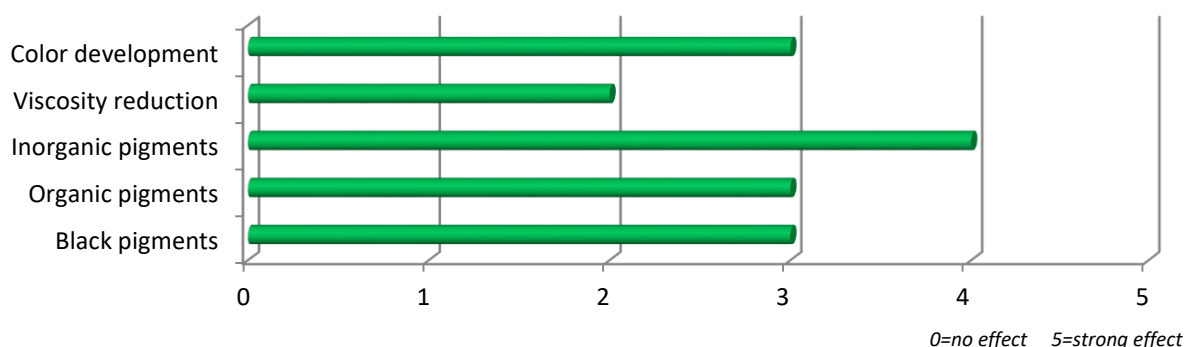

UNIQ[®] SPERSE 770U is wetting and dispersing additive for solvent-borne architectural coatings and pigment concentrates on the basis of alkyd resins. The additive is suitable for all pigments

Special Features

- Dispersant for organic and inorganic pigment, especially inorganic pigment
- Prevention of flooding and floating
- Reduce dispersion time
- Suitable for low polarity system like TPA and NC

Application

Architectural coatings	■
Wood and furniture coatings	■
Automotive and refinish coatings	□
Can/coil coatings	□
Protective coatings	□

highly recommended ■

recommended □

Product Specification

Active ingredients	100 %
Density 20°C	0.95 g/cm ³
Amine value	80.0 mg KOH/g
Appearance	Brownish liquid

Addition levels

Amount of solid additive based on pigment (SOP):

- Inorganic pigments: 0.2 - 5%
- Titanium dioxides: 1 - 3%
- Organic pigments: 2 - 5%
- Bentonites 15 - 25%

The above recommended levels can be used for orientation and needs to be optimized by testing.

Packaging

- 22 kg
- 190 kg

Shelf life

UNIQ[®] SPERSE 770U should be stored in a cool dry place. When kept in an original unopened container, it will keep up to 5 years from the date of manufacture.